

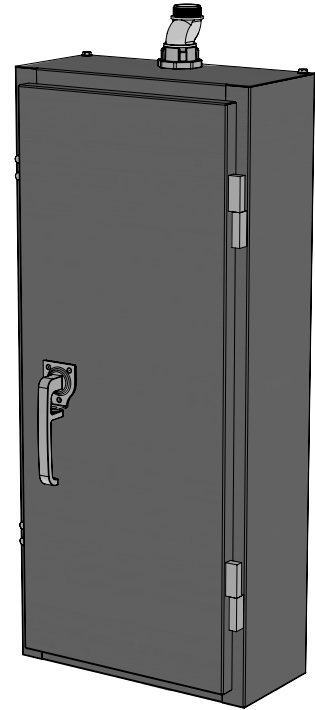




HIGHWAY SERVICE PANEL

HWYSP16

This family of HWYSP16 Highway Service Panels can be used on any steel pole for street lighting or power distribution and are fed from a supply authority underground or overhead service. The padlockable swing door enables easy access. A Type 3R rating and stainless steel construction offer additional protection.

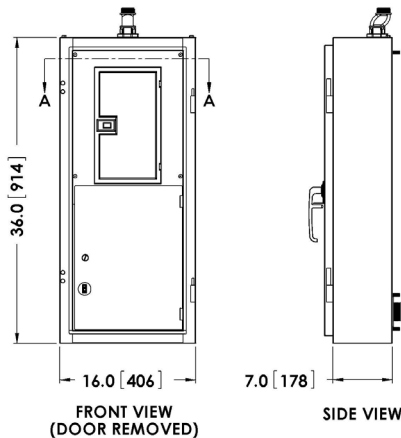

Features/Specifications:

- 304 stainless steel construction
- Service entrance rated
- CSA Type 3R rated
- Overhead or underground service applications
- Photocell bypass switch
- Lock-out tab on main breaker
- Mounting hardware and conduit fittings included
- 16 cct panel
- 120/240 VAC 1 phase
- 10 kAIC rated
- 100A main breaker (standard)
- Padlockable handle
- 1 1/4" conduit entry & 2" pole access hole on back
- Contactors & controls section for up to four 4 pole contactors or flashers
- Listed on BC MOT&I recognized products list

Optional Components:

- 60A main breaker
- Snowplow debris cover
- Up to 4 lighting contactors
- Flasher controls
- Sub breakers as required up to 22 kAIC
- Additional contactors

ADDITIONAL OPTIONS
CROSSWALK FLASHER
WARNING BOARD FLASHER
LIGHTING CONTACTOR (QTY1)
LIGHTING CONTACTOR (QTY2)
LIGHTING CONTACTOR (QTY3)
LIGHTING CONTACTOR (QTY4)

PART NUMBER	HEIGHT	WIDTH	DEPTH	MAIN SERVICE	SERVICE	MAX # CONTACTORS
HWYSP16-6S	36"	16"	8"	120/240V 60A 1PH	Overhead	4
HWYSP16-10S*	36"	16"	8"	120/240V 100A 1PH	Overhead	4
HWYSP16-6S-U	36"	16"	8"	120/240V 60A 1PH	Underground	4
HWYSP16-10S-U	36"	16"	8"	120/240V 100A 1PH	Underground	4

* Factory standard design

CONSULT FACTORY FOR ALL OPTIONAL CONFIGURATIONS