



valid MANUFACTURING Ltd.
Advanced technology... Simple solutions.


PARKING LOT CONTROLLER WITH ENERSAVE LOGIC & MAIN CONTACTOR

VPC-DB

The VPC-DB Parking Lot Controller uses the Enersave logic to control multiple set points for parking lot applications. The weather proof design is ideal for outdoor use. Standard PC101 grey powder coat paint provides a durable finish. This line of Parking Lot Controller is all encompassing with the main contactor and breaker panel located in a single pad mount enclosure.



| PART NUMBER | MAIN CONTACTOR AMPS | CIRCUITS |
|---------------|---------------------|----------|
| VPC-DB-60-12 | 60 | 12 |
| VPC-DB-75-12 | 75 | 12 |
| VPC-DB-90-18 | 90 | 18 |
| VPC-DB-90-30 | 90 | 30 |
| VPC-DB-115-30 | 115 | 30 |
| VPC-DB-150-30 | 150 | 30 |
| VPC-DB-150-42 | 150 | 42 |
| VPC-DB-185-30 | 185 | 30 |
| VPC-DB-185-42 | 185 | 42 |
| VPC-DB-225-30 | 225 | 30 |
| VPC-DB-225-42 | 225 | 42 |

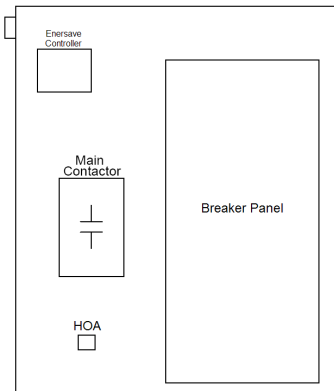

Features/Specifications

- Steel construction
- CSA Type 3R rated
- Pad lockable handle
- Enersave Temperature Controller with:
 - Up to (4) set points customer programmable temperature set points (recommended -5°C, -10°C, -15°C, -20°C)
 - Programmable number of set points
 - Duration of cycle
 - Supervisory Enable Signal
- Easy field configuration via jumper settings
- Standard 120/208V 3 Phase
- HOA switch to bypass logic
- Temperature sensing cable with weather proof cover
- Main contactor & circuit breaker panel
- Pad mount design
- PC101 Grey powder coat finish

Optional Items

- Wall mounted enclosure
- Higher amperage ratings
- Single phase (120/240V)
- Time of day clock
- Aluminum or stainless steel construction
- CSA type 1, 4 or 4X rated
- Remote sensing thermostat
- Custom powder coat colours

19909-18991

Toll Free Phone: 888-632-6477

Phone 250-832-6477

Fax: 250-832-7746

E-mail: sales@validmanufacturing.com

www.validmanufacturing.com