


## METERED DIRECT BURIAL CAMPGROUND PEDESTAL

### RVBM

This pedestal style is a direct burial design providing the RV owner with a single power point. All receptacles are protected by breakers on the pedestal and the check meter allows monitoring of power consumption.

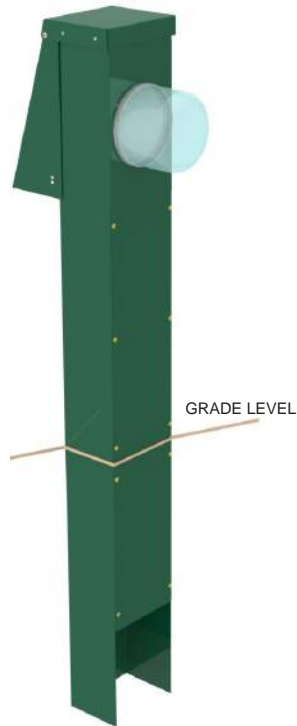

#### Features/Specifications

- Galvanized steel construction
- Aluminum cap for additional corrosion protection
- CSA Type 3R rated
- Loop feed power termination lugs
- 10kAIR branch rated breaker protection
- Series electrical design (larger amperage breaker protects lower amperage breakers) to prevent main service overload
- Padlockable cover
- 100A meter socket
- PC113 Parks Green powder coat finish
- 34"H x 7"W x 5.25"D galvanized steel construction
- 24" direct burial spade
- Standard splitter blocks #14-2/0

| PART NUMBER | QTY | RECEPTACLES       | BREAKERS |        |
|-------------|-----|-------------------|----------|--------|
|             |     | TYPE              | QTY      | TYPE   |
| RVBM1       | 1   | 15A GFI DUPLEX    | 1        | 15A 1P |
| RVBM2       | 2   | 15A GFI DUPLEX    | 2        | 15A 1P |
| RVBM3       | 1   | 15A GFI DUPLEX    | 1        | 15A 1P |
|             | 1   | 30A 125V CROWFOOT | 1        | 30A 1P |
| RVBM4       | 1   | 15A GFI DUPLEX    | 1        | 15A 1P |
|             | 1   | 30A 125V CROWFOOT | 1        | 30A 1P |
|             | 1   | 50A 125/250V      | 1        | 50A 2P |
| RVBM5       | 1   | 15A GFI DUPLEX    | 1        | 15A 1P |
|             | 1   | 50A 125/250V      | 1        | 50A 2P |
| RVBM6       | 1   | 20A GFI DUPLEX    | 1        | 20A 1P |
| RVBM7       | 2   | 20A GFI DUPLEX    | 2        | 20A 1P |
| RVBM8       | 1   | 20A GFI DUPLEX    | 1        | 20A 1P |
|             | 1   | 30A 125V CROWFOOT | 1        | 30A 1P |
| RVBM9       | 1   | 20A GFI DUPLEX    | 1        | 20A 1P |
|             | 1   | 30A 125V CROWFOOT | 1        | 30A 1P |
|             | 1   | 50A 125/250V      | 1        | 50A 2P |
| RVBM10      | 1   | 20A GFI DUPLEX    | 1        | 20A 1P |
|             | 1   | 50A 125/250V      | 1        | 50A 2P |
| RVBM11      | 1   | 30A 125V CROWFOOT | 1        | 30A 1P |
|             | 1   | 50A 125/250V      | 1        | 50A 2P |
| RVBM14      | 1   | 30A 125V CROWFOOT | 1        | 30A 1P |
| RVBM16      | 1   | 50A 125/250V      | 1        | 50A 2P |
| RVBM17      | 2   | 30A 125V CROWFOOT | 2        | 30A 1P |
| RVBM18      | 2   | 50A 125/250V      | 2        | 50A 2P |

ADDITIONAL PART NUMBERS AND CONFIGURATIONS ON BACK

#### Optional Components

- Top light
- Side light
- Photocell
- Additional receptacle configurations
- Low voltage section with cable telephone or network outlets
- Remote metering systems
- Higher amperage feedthru lugs
- Custom powder coat colours including beige, grey and white

**Toll Free Phone: 888-632-6477**

Phone 250-832-6477

Fax: 250-832-7746

E-mail: sales@validmanufacturing.com

**www.validmanufacturing.com**



**valid MANUFACTURING Ltd.**  
Advanced technology... Simple solutions.

# METERED DIRECT BURIAL CAMPGROUND PEDESTAL

## RVBM

ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 4)  
ADD TO PART NUMBER e.g. RVBM-AAM-PSV


| RECEPTACLE        | BREAKER | ADDER |
|-------------------|---------|-------|
| 15A DUPLEX GFI    | 15A 1P  | A     |
| 20A DUPLEX GFI    | 20A 1P  | B     |
| 15A DUPLEX        | 15A 1P  | D     |
| 20A DUPLEX        | 20A 1P  | E     |
| 15A TL 125V       | 15A 1P  | F     |
| 20A TL 125V       | 20A 1P  | G     |
| 30A CROWFOOT 125V | 30A 1P  | H     |
| 30A TL 125V       | 30A 1P  | J     |
| 30A 125/250V      | 30A 2P  | K     |
| 50A 125/250V      | 50A 2P  | M     |
| 50A 125/250V TL   | 50A 2P  | Q     |

ADDITIONAL COMPONENTS  
ADD TO PART NUMBER e.g. RVBM4-PSV

| OPTIONS                               | ADDER |
|---------------------------------------|-------|
| CUSTOM LUGS (UP TO 250 MCM FEED THRU) | L2    |
| CUSTOM LUGS (UP TO 600 MCM FEED THRU) | L6    |
| CUSTOM LUGS (OTHER CONFIGURATIONS)    | LL    |
| CABLE                                 | C     |
| TELEPHONE                             | V     |
| NETWORK                               | N     |
| TOP LIGHT                             | T     |
| SIDE LIGHT                            | S     |
| PHOTOCELL                             | P     |



TOP VIEW

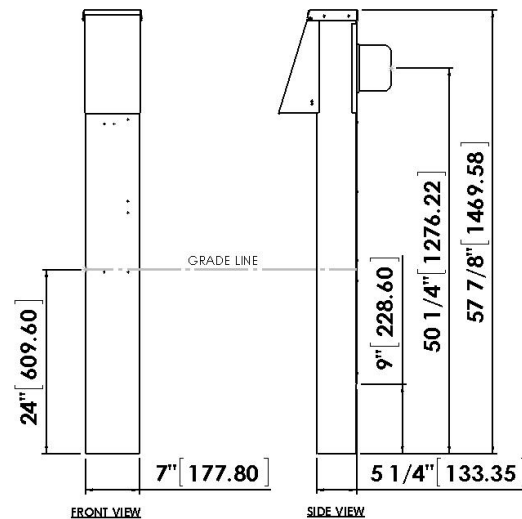

Toll Free Phone: 888-632-6477

Phone 250-832-6477

Fax: 250-832-7746

E-mail: sales@validmanufacturing.com

[www.validmanufacturing.com](http://www.validmanufacturing.com)